



Building a safe, sustainable, welcoming community.




Hand Delivered.

Fergus Street (Wellington St – Birmingham St), Mount Forest NOTICE OF CONSTRUCTION AND ROAD CLOSURE

April 29, 2024

The Township of Wellington North wishes to advise you of the reconstruction of Fergus Street between Wellington Street and Birmingham Street in Mount Forest (refer to key plan, below) will be taking place shortly. The Township of Wellington North's contractor, Kurtis Smith Excavating, plans to be full reconstruction of Fergus Street beginning as early as Tuesday April 30th, 2024 (see below key plan). Kurtis Smith Excavating expects to close this section of roadway beginning as early as Tuesday, April 30, 2024, and lasting until the end of June 2024. Local and emergency access will be maintained throughout construction; however, access to driveways will be interrupted at various times during this period. Effort will be given to advise residents of any disruption to access in advance. Some construction activities may continue to the end of July 2024. Reconstruction will include full replacement of watermain, various services from main to property line, roadway, sidewalk installation, driveway entrances and road asphalt. Project plans can be viewed at <https://wellington-north.com/government/capital-projects>.

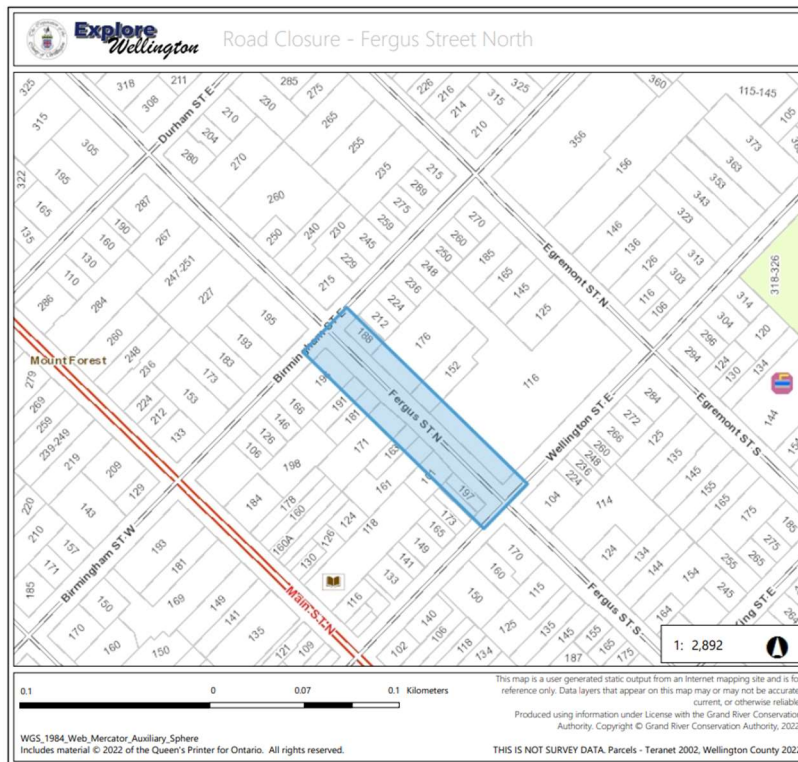

Stronger together since 1999



7490 Sideroad 7 W, PO Box 125, Kenilworth, ON N0G 2E0

www.wellington-north.com



519-848-3620

Properties with sump pumps will be required to connect to the new storm services as per the attached standard drawing S7. Township will reimburse homeowners up to \$250 upon submission of completed work and a paid contractor's invoice. Refer to By-Law No. 094-16 for more information as found at <https://www.wellington-north.com/sites/default/files/2021-12/sewer-connection-by-law-094-16.pdf>).

Kurtis Smith Excavating will be installing temporary watermain for water supply to your property during the construction period. The pipe proposed for this use will be installed on the existing ground with a service pipe connected to an outside tap or connected to your existing water service at property line. This temporary water system will be fully tested to meet Provincial and Municipal Standards before it is placed into operation. It will be monitored and tested regularly throughout the construction period.


Regarding garbage and recycling: On your designated waste and recycling collection days, please put your bags and recycling boxes at the standard roadside pick-up location by 7 a.m. Construction staff will pick them up and move them to a designated pick-up location as coordinated between Kurtis Smith Excavating and the County of Wellington Solid Waste Services Division. Kurtis Smith Excavating return your recycling boxes to your property. Please ensure your recycling boxes are clearly marked with your civic address.

If you have any questions, concerns, or feedback, please contact:

Izaak De Jager, P.Eng.
B. M. Ross and Associates Limited OR
519-323-2945 Ext. 303
idejager@bmross.net

Colin Grubb
Kurtis Smith Excavating
519-887-8855
ksei6@outlook.com

Regards,
Tammy Stevenson, C.E.T.
Senior Project Manager
519-848-3620 Ext. 4629
tstevenson@wellington-north.com

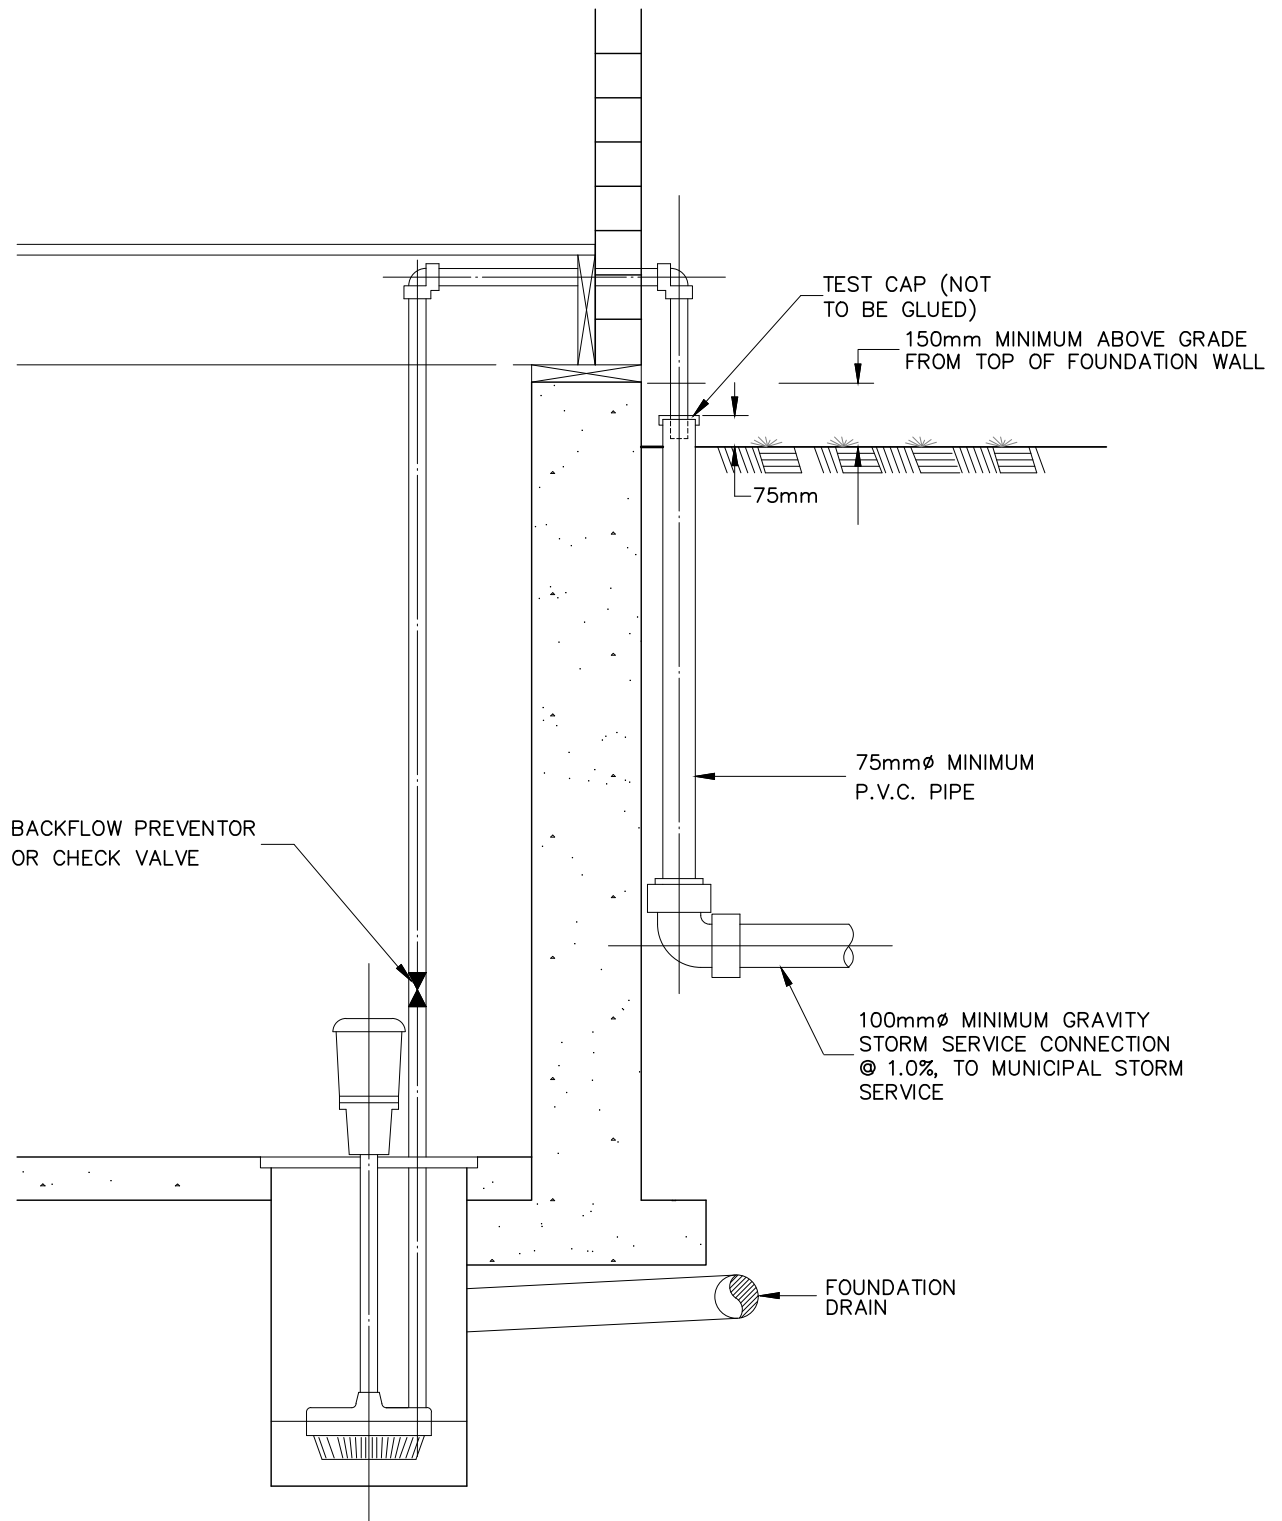

NOTE:

1. MUNICIPAL STORM SERVICE CONNECTION TO BE LOCATED FIRST.

TOWNSHIP OF WELLINGTON NORTH	DATE APRIL, 2022	REV. 1
SUMP PUMP TO STORM SERVICE CONNECTION		STD. S7